


Payment terminals · Ticketing and access

WizarPOS Ticket Validator

Ticket, card or phone at the entrance: transport, events, pools and paid zones.

Product code: SPC-PT-TVAL-01

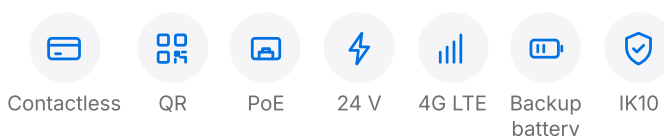

The Ticket Validator mounts on a grab pole in a bus, at a gate or at the entrance to a paid zone. Passengers and guests tap a payment card or phone, or scan a QR ticket, and the validator confirms the journey or entry. A 24 V or PoE supply, SAM slots for transit cards and an optional backup battery suit both vehicles and venues.

Where it fits

Public transport · Events and attractions · Hotel leisure

Card acceptance

Accepts Visa and Mastercard cards (contactless) and mobile wallets – subject to the acquirer.

Key features

Contactless payment

On-screen tap for cards and phones.

QR scanner

1D and 2D tickets from a phone or on paper.

PoE or 24 V

Power over Ethernet, or a 24 V supply in vehicles.

SAM slots

SIM + SAM or 2 × SAM for transit cards and ticketing systems.

Tough

IK10 and an operating range of -20 to +60 °C.

Two-way mounting

On a pole or a wall, with or without the stand.

Manufacturer data (WizarPOS) as of October 2026. Certifications are as declared by the manufacturer and apply to specific models and hardware revisions; certificate numbers are available on request. Specifications are subject to change.

Technical specification

PLATFORM

Operating system	Secure Android 7
Processor	Qualcomm + secure chip
Memory	1 GB RAM + 8 GB Flash, or 2 GB RAM + 16 GB Flash
Display	4" colour multi-touch, 480 × 800
Card slots	1 × SIM + 1 × SAM, or 2 × SAM

PAYMENTS

Contactless (NFC)	ISO 14443 A/B, MIFARE, Sony FeliCa
Scanner	1D and 2D codes, QR
Certifications (manufacturer's declaration)	PCI PTS, EMV L1 and L2, EMV Contactless L1, PayPass, payWave, ExpressPay, D-PAS, Mastercard TQM, SRED, CE, FCC, RoHS

CONNECTIVITY AND PORTS

Connectivity	2G/3G/4G LTE, Wi-Fi 2.4 GHz, Bluetooth 4.0, eSIM (optional)
Ports	RS232/RS485, Ethernet (PoE), USB-A, DC jack, external antenna (optional)
Positioning	GPS, A-GPS

POWER AND BUILD

Power	24 V DC or PoE
Battery	backup (optional): up to 30 minutes
Enclosure	IK10 impact protection
Operating temperature	-20 to +60 °C
Dimensions (L × W × H)	212 × 95 × 87.5 mm with stand; 212 × 95 × 45.5 mm without
Weight	205 g

In the box

- Ticket Validator
- Mounting kit as ordered

Accessories and services

- Terminal activation with remote key injection (RKI)
- Payment application licence and TMS (monthly subscription)
- Integration with the SPACE platform (access control, hotel, EV charging)

Payments

Transactions are settled by the acquirer chosen by the merchant. We help you select and onboard one.

Deployment

Activation, remote key injection and terminal management (TMS) are available from Space BMS.

Contact

Space BMS sp. z o.o., ul. Zbożowa 3/6, 30-002 Kraków, Poland · +48 533 909 533 · www.spacebms.com



Full online catalogue
portal.spacebms.com/kata

Manufacturer data (WizarPOS) as of October 2026. Certifications are as declared by the manufacturer and apply to specific models and hardware revisions; certificate numbers are available on request. Specifications are subject to change.